

BUILT FOR THE LONG HAUL



GOOSENECK TOOL BOX



SELF-CLEANING BEAVERTAIL



POP-UP BEAVERTAIL



BUCKET SLOT BEAVERTAIL




GOOSENECK TRAILERS

TANDEM DUAL AXLE GOOSENECK

STANDARD EQUIPMENT

- G.V.W.R. 22,500 #
- G.A.W.R. 10,000 #
- Oil-Bath, Electric Brake Axles
- Heavy Duty, Multi-Leaf Slipper Spring Suspension With Equalizer
- Custom Fabricated Main Beams
- 102" Deck Width
- Tandem Dual Wheels 16 x 6 (8-Lug)
- ST235/80R16 Radial Tires, Load Range E
- Spare Tire Mount
- 2" Nominal Douglas Fir Deck, Double Screwed to Crossmembers
- 4" Hi-Tensile I-Beam Crossmembers on 16" Centers, Pierced Through Main Beam
- Formed Crossmember to Frame Gussets
- Two 12,000# Drop Leg Jacks (bolted on)
- Breakaway System With Battery
- Sealed Modular Wiring Harness
- Grommet Mounted LED Lights
- Two Side Bed Steps
- 3/8" Grade 70 Safety Chains With Safety Latch Hooks
- 6" Channel Side Rail
- Rub Rail, Stake Pockets and Pipe Spools
- Torque Tube on 28' (Flat Deck) and Longer
- 2 Component Automotive Grade Polyurethane Primer and Paint Applied Before Installing Decking
- 5' Dovetail With Spring Assisted Ramps
- 7-Way R.V. Electric Plug

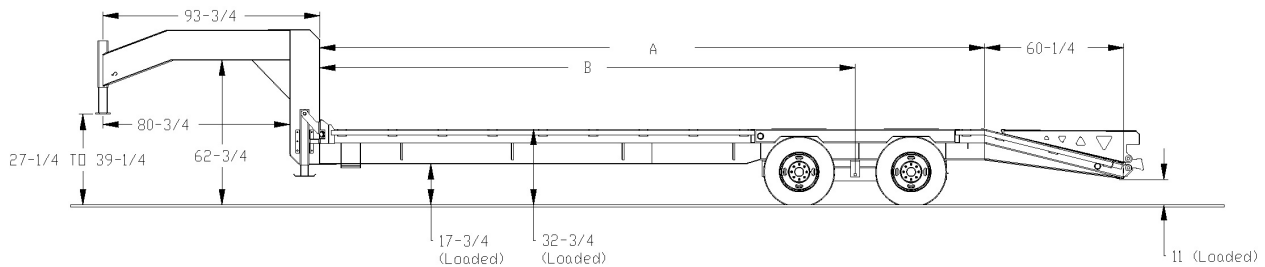

OPTIONAL FEATURES

- No Beavertail (Straight Deck)
- 16" Spare Tire and Wheel
- Double Door Tool/Chain Box Between Gooseneck Uprights (Aluminum or Powder Coated Steel)
- Low Profile Tool Box 15" x 19" x 42" (Side Mount)
- 2" Nominal Oak Deck (S4S)
- 1½" Nominal Apitong Deck
- Electric Over Hydraulic Brakes
- D-Ring Tie Downs

Specifications are subject to change without notice.

DIMENSIONS

LENGTH	WITH BEAVERTAIL		WITH STRAIGHT DECK	
	A	B	A	B
20'	240"	184"	240"	160"
22'	264"	208"	264"	176"
24'	288"	232"	288"	192"
26'	312"	248"	312"	208"
28'	336"	264"	336"	224"
30'	360"	280"	360"	242"
32'	384"	296"	384"	256"
34'	408"	312"	408"	272"
36'	STRAIGHT DECK ONLY FOR TRAILERS 36' AND LONGER		432"	290"
38'			456"	304"
40'			480"	320"